

data

## SHEET



## QuickLink Series — Fixed-Port Active Hubs

For an economical way of expanding ARCNET® Local Area Networks (LANs), choose the QuickLink Series of fixed-port hubs. A hub allows you to add a segment and support distributed star topologies. These eight-port hubs use the same robust hub timing electronics found in the Contemporary Controls MOD HUB Series such as precision delay-line timing, digitally controlled timers for dependable operation and reduced bit jitter. A watch-dog timer stops hub lockup, eliminating the necessity of cycling power in case of transmission error.

The QuickLink operates from low-voltage AC power (8–24 VAC), using a power supply which features a fullwave solid-state bridge rectifier. Although nominally designed for powering from a 24 VAC source, this hub can also be powered from a 24 VDC

source, irrespective of the polarity of the applied voltage, with no performance degradation.

Active hubs increase the robustness of ARCNET networks and extend the distance possible on each cable segment up to 610 m (2000 feet). These products block interference to the network by squelching reflections caused by open or shorted cable segments attached to the hub. Unused hub ports need not be terminated. Active hubs allow distributed star topology — thereby, reducing the cabling required in a facility. Two or more QuickLink hubs may be cascaded.

Each unit is shipped with a wall-mounted transformer having a 2 m low-voltage cord — so that it may work from local mains power, if needed.

### Compatible with the baseband 2.5 Mbps ARCNET® network

- Minimizes bit jitter with precision delay line timing
- Watch-dog timer prevents hub lockup
- Hub unlatch delay digitally controlled
- Low-voltage AC powered
- CE Mark
- RoHS compliant



North American transformer shown



## Coaxial Cabling Topologies

### Coaxial Cabling

ARCNET is typically cabled with RG-62/u coaxial cable and BNC connectors. The end of each cable segment must be terminated. This termination may be built into the device (as is the case with active hubs like the QuickLink) or added to the equipment with a terminator with 93 ohms of resistance. Never attach a BNC Tee connector to a port on the QuickLink — or any other device that has built-in termination. Unused ports on the QuickLink hub require no termination. Up to ten hubs can be cascaded — providing a maximum overall cable length of 22,000 feet.

### Coaxial Star Topology

(Contemporary Controls model numbers ending in -CXS)

In a point-to-point fashion, each network interface module (NIM) can connect to one other NIM or connect directly to an unused port on the QuickLink hub. Hub-to-hub connections are allowed. The coaxial star configuration simplifies troubleshooting and provides the longest segment distance of 610 m (2000 feet).

### Coaxial Bus Topology

(Contemporary Controls model numbers ending in -CXB)

The amount of coaxial cable required for a network can be reduced by employing a bus which uses BNC Tee connectors. Each connector builds a “daisy-chain” by accepting one cable in and one cable out of the Tee. In a bus, each -CXB port presents a high-impedance in both its powered and unpowered states. If such a port ends the chain, its Tee connector will require a 93-ohm terminator to balance the one attached cable.

Each bus segment can support up to eight nodes and a maximum segment length of 305 m (1000 feet). To extend a segment, connect the QuickLink at the end of the segment — never connect the hub in the middle of a segment. At one end of the original segment, remove the terminator from the Tee and, in its place, run cable to the QuickLink. The original segment requires no other changes.



## Specifications

### Electrical Input <sup>1</sup>

#### AC

Voltage	8–24 VAC
Power	6 VA
Frequency	47–63 Hz

### Environmental/Mechanical

Operating temperature	0°C to 60°C
Storage temperature	–40°C to +85°C
Relative humidity	10–95%, non-condensing
Protection	IP30

### Functionality

Data rate	2.5 Mbps	
Cable length (max)	<b>Star Segment (point-to-point)</b> 610 m (2000 feet)	<b>Bus Segment (up to 8 nodes)</b> 305 m (1000 feet)
Hub, repeaters and link delay	320 ns typical	
Unlatch delay time	5.9 µs typical	
Compliance	ATA 878.1-1999	

### LED indicators

ACTIVITY — green

### Regulatory Compliance

CE Mark  
RoHS  
CFR 47, Part 15 Class A




<sup>1</sup> For operation from mains power, a transformer (appropriate for your geographic location) is provided.

## Electromagnetic Compatibility

Standard	Test Method	Description	Test Levels
EN 55024	EN 61000-4-2	Electrostatic Discharge	8 kV contact
EN 55024	EN 61000-4-3	Radiated Immunity	10 V/m, 80 MHz to 1 GHz
EN 55024	EN 61000-4-4	Fast Transient Burst	1 kV clamp, 2 kV direct
EN 55024	EN 61000-4-5	Voltage Surge	1 kV L-L, 2 kV L-Earth
EN 55024	EN 61000-4-6	Conducted Immunity	10 Volts (rms)
EN 55024	EN 61000-4-11	Voltage Dips & Interruptions	1 Line Cycle, 1 to 5 s @ 100% dip
EN 55022	CISPR 22	Radiated Emissions	Class A
EN 55022	CISPR 22	Conducted Emissions	Class A
CFR 47, Part 15	ANSI C63-4	Radiated Emissions	Class A

**Mechanical Diagram**

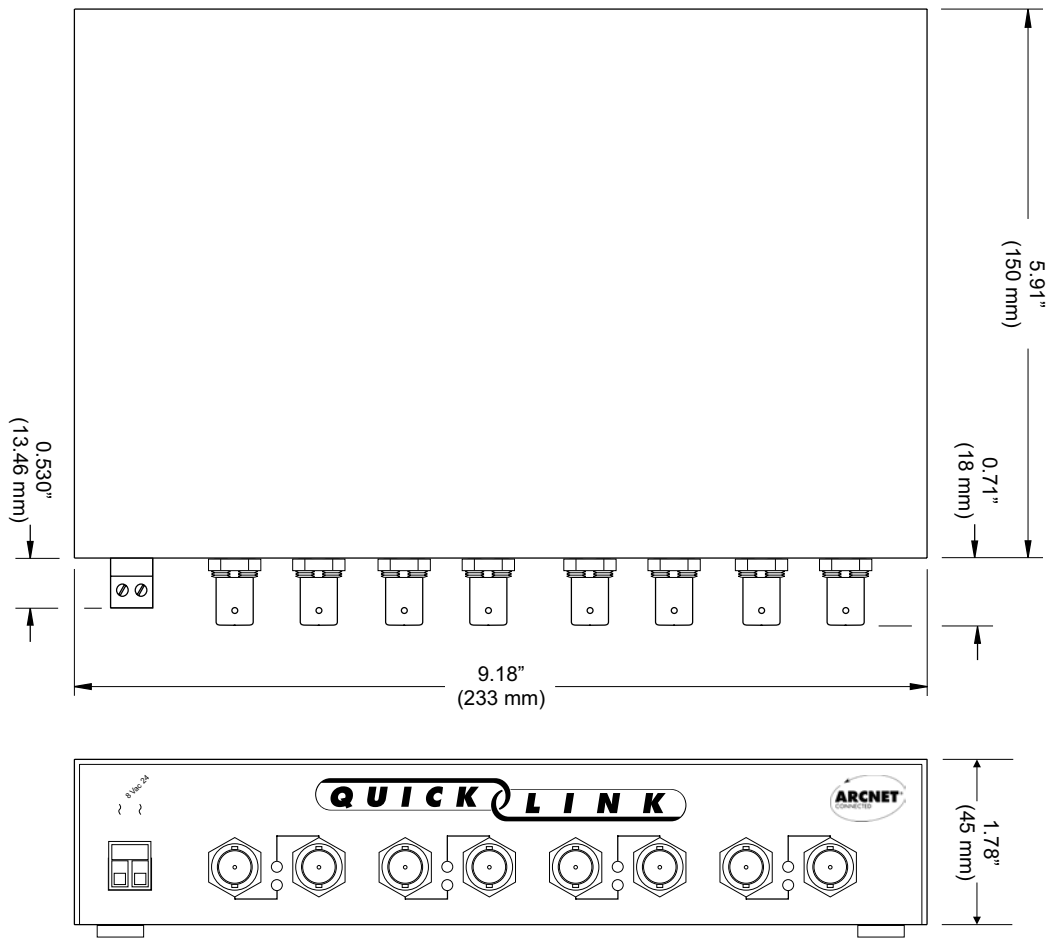

**Ordering Information**

<b>Model</b>	<b>Description</b>
QL-CXS	Coaxial star 8-port hub 120 VAC (nom)
QL-CXS-E	Coaxial star 8-port hub 230 VAC (nom)

<b>United States</b>	<b>China</b>	<b>United Kingdom</b>	<b>Germany</b>
<b>Contemporary Control Systems, Inc.</b> 2431 Curtiss Street Downers Grove, IL 60515 USA	<b>Contemporary Controls (Suzhou) Co. Ltd</b> 11 Huoju Road Science & Technology Industrial Park New District, Suzhou PR China 215009	<b>Contemporary Controls Ltd</b> 14 Bow Court Fletchworth Gate Coventry CV5 6SP United Kingdom	<b>Contemporary Controls GmbH</b> Fuggerstraße 1 B 04158 Leipzig Germany
Tel: +1 630 963 7070 Fax: +1 630 963 0109	Tel: +86 512 68095866 Fax: +86 512 68093760	Tel: +44 (0)24 7641 3786 Fax: +44 (0)24 7641 3923	Tel: +49 341 520359 0 Fax: +49 341 520359 16
<a href="mailto:info@ccontrols.com">info@ccontrols.com</a> <a href="http://www.ccontrols.com">www.ccontrols.com</a>	<a href="mailto:info@ccontrols.com.cn">info@ccontrols.com.cn</a> <a href="http://www.ccontrols.asia">www.ccontrols.asia</a>	<a href="mailto:info@ccontrols.co.uk">info@ccontrols.co.uk</a> <a href="http://www.ccontrols.eu">www.ccontrols.eu</a>	<a href="mailto:info@ccontrols.de">info@ccontrols.de</a> <a href="http://www.ccontrols.eu">www.ccontrols.eu</a>